

Wall-mounted blank post

Fixing through 1-inch front access holes · step by step

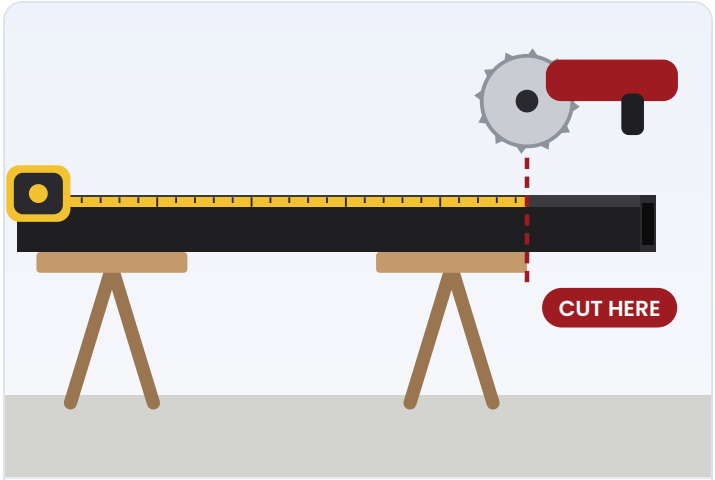


1 CUT THE POST TO LENGTH

Measure and cut the blank post to the required height.

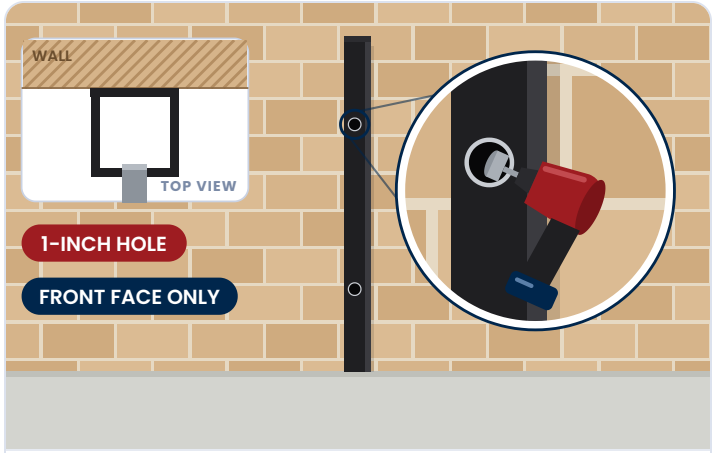

2 DRILL THE ACCESS HOLES

Drill a 1-inch hole through the front face only, at each of the 2 fixing points.

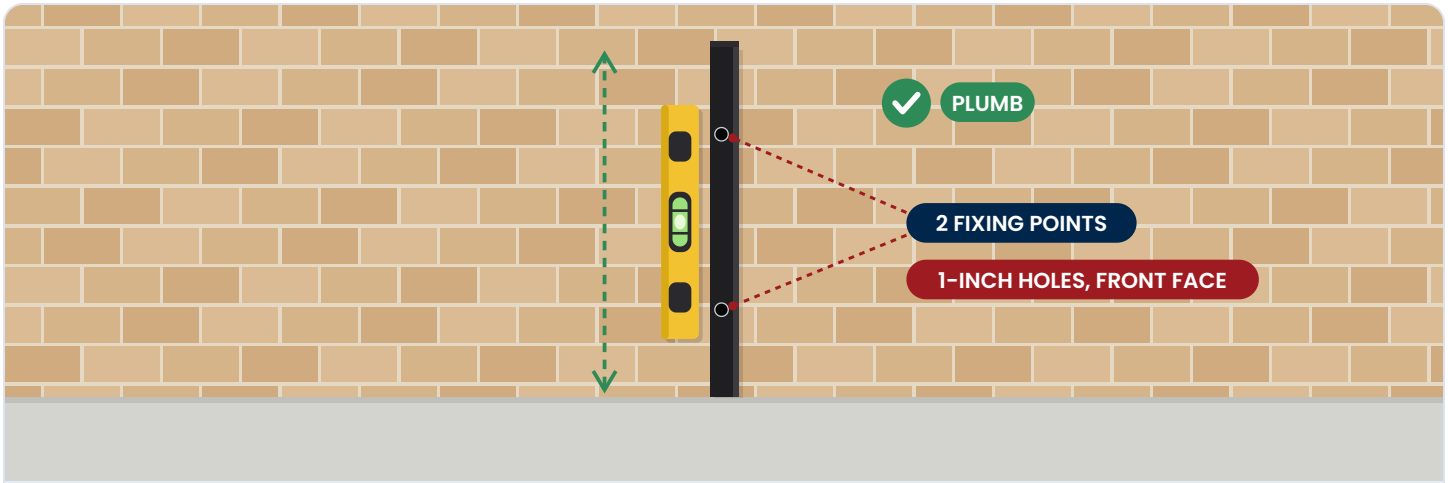

3 PLUMB THE POST

Hold the post against the wall and check it is vertical.

What you'll need

- Tape measure and pencil
- Saw with a non-ferrous (aluminum) blade
- Drill/driver with a 1-inch hole saw or step bit
- Bit and anchors that suit your wall
- Long driver bit or extension
- Level
- Black hole plugs (2 per post)

Choosing the anchor


Use a fastener rated for the wall you're fixing to: a masonry anchor or screw for concrete, block or brick, or a structural screw into solid framing for a timber wall. Follow the anchor maker's bit size and depth.

Why front access holes? Blank posts are plain on every face, with no slots, so any face can be the front. You fix the post through a 1-inch hole at each of the 2 fixing points, then plug the holes. No brackets show.

One 1-inch access hole per fixing point, in the outside face only. No large access hole on the wall side.


Wall-mounted blank post

Fixing through 1-inch front access holes · step by step

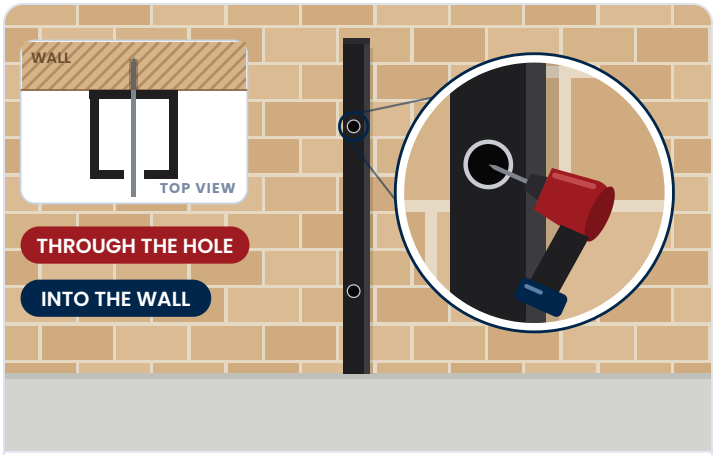

4 DRILL FOR THE ANCHOR

Through each access hole, drill the void for the selected fastener or anchor.

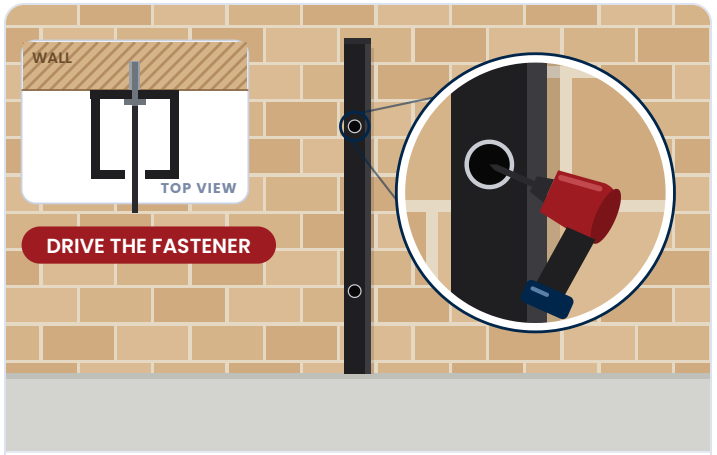


5 FASTEN THROUGH THE POST

Reach through the front hole and drive the fastener into the wall.



6 CHECK THE POST IS LEVEL


Check the post is plumb before tightening the anchors.

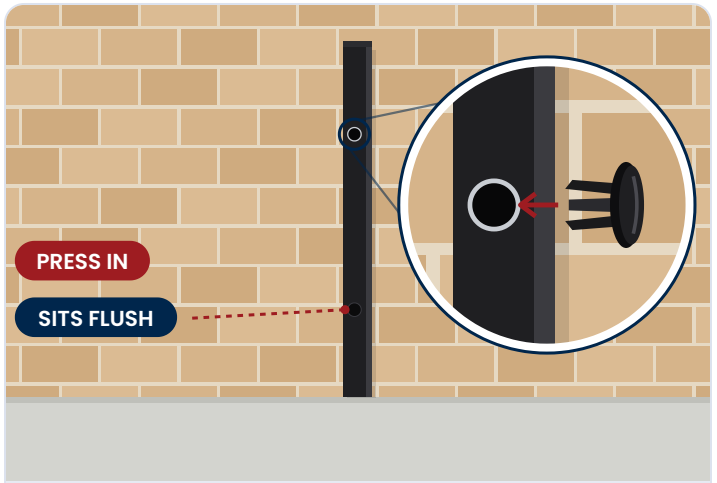

7 FIT THE HOLE PLUGS

Press in the matching plug until it sits flush.

What are the hole plugs for?

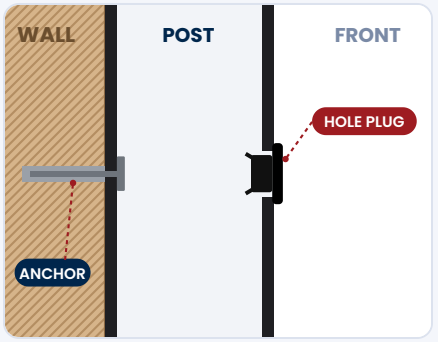

The 1-inch holes are only there so you can reach the fasteners. Once the post is fixed, plugs close them off:

- ✓ **Clean finish.** Black plugs match the powder coat, so the fixing disappears.
- ✓ **Keeps the post sealed.** Stops water, dirt and insects getting inside.
- ✓ **Hides the fixings.** Nothing to see or tamper with from the front.

Hole Plugs Black (4-pack) →

One 1-inch access hole per fixing point, in the outside face only. No large access hole on the wall side.